



**Check valve, family E, type B, DN8, PN10, acoustic group I, acc. EN 13959, ST10/DN8**

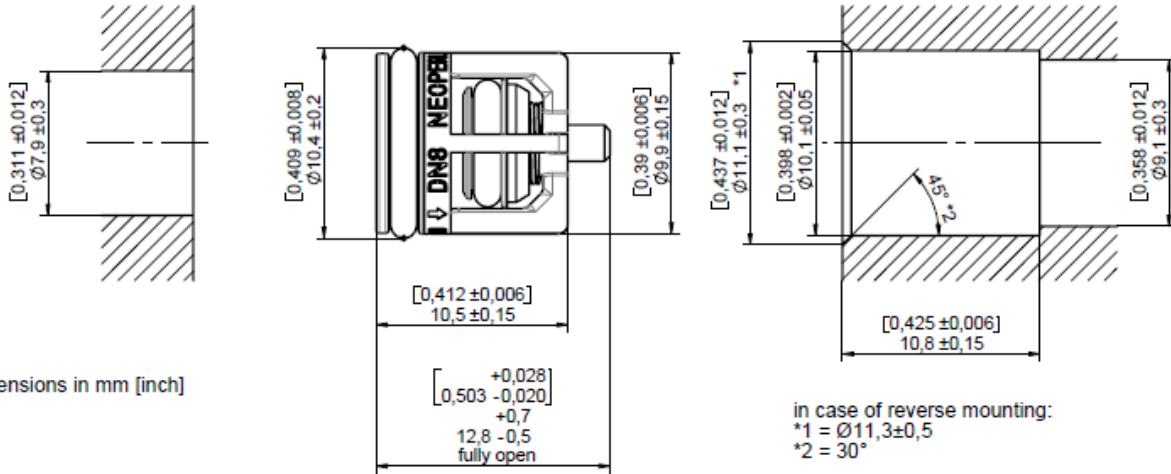


Max. operating temperature 65°C,  
 max. 1h at 90°C


**Assembly:**  
 Use pure water or vaseline for assembly

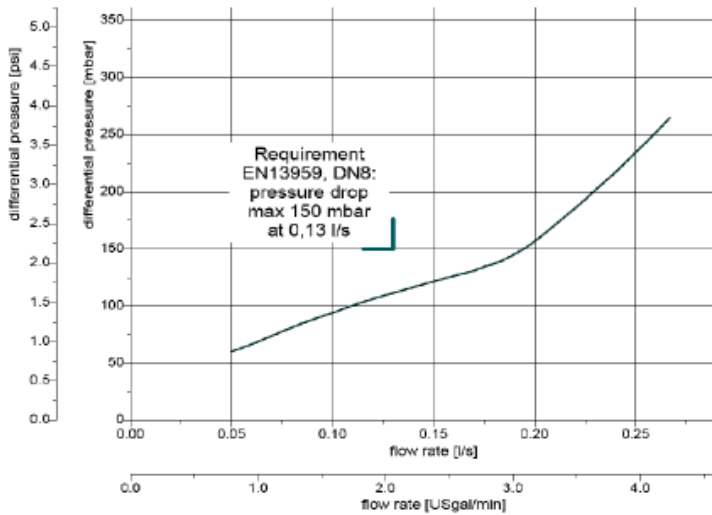

**List of Material:**

- O-Ring            Silicone
- Spring            Stainless Steel
- Plunger           POM
- Guidance        POM
- Ring Cap         POM



Modif. 4				 M.Z. DEL RIO, S.A.	
Modif. 3					
Modif. 2					
Modif. 1	09/09/24	G.CASANOVA	Actualizar a diseño recibido por proveedor		
Dibujado	05/04/18	A. SANZ	TOLERANCIAS GENERALES SIN IDENTIFICACION SEGUN EN22768-1	ROSCAS H-6 MECANIZADO GENERAL N9: EXCEPTO LOS INDICADOS	
Comprobado		L. MIGUEL	DIMENSIONES LINEALES (mm) ±0.1		
ESCALA	MATERIAL	DESCRIPCIÓN			EDICIÓN
<b>1:1</b>	LATÓN	VÁLVULA ANTI RETORNO $\varnothing 10$ MM		002	VA0015-99