


# Universal single-lever valve with 2 outlets

Cod. Product  
**CMB033-99**  
Cod. EAN  
**8435305741266**

Finish  
Material brass

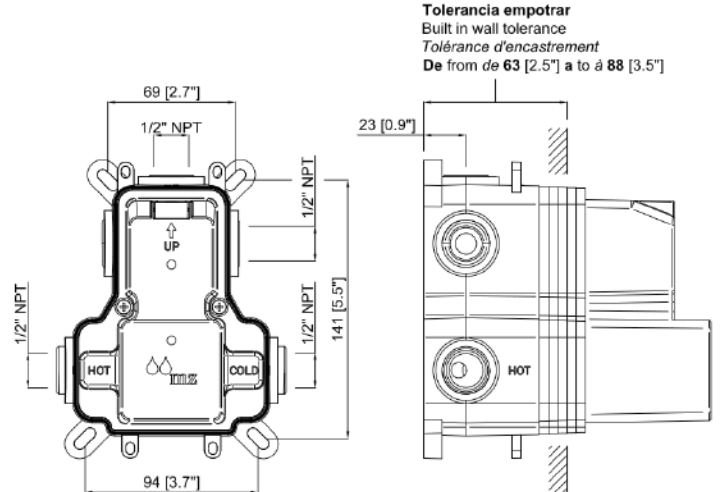

**Tolerancia empotrar**  
Built in wall tolerance  
*Tolérance d'encastrement*  
De from de 63 [2.5"] a to à 88 [3.5"]



## Specifications

- Brass body and components
- Flow rate 3,57 gpm (16.2 l/min) at 58 psi (4 bar)
- Minimum working pressure 1.4 bar (20 psi)
- Recommended working pressure 4 bar (58 psi)
- Maximum working pressure 125 psi (8 bar (125 psi)
- Maximum recessed tolerance 40 (1.6") to 75 (3")



## Included accessories

- MZ Box for easy installation.
- Pre-installation protective housing.
- Level incorporated in the installation box.



## Standards

- UPC
- ASME A112.18.1
- ASSE 1016
- CSA B125.1.



## Warranties

- 5 years against manufacturing defects.



If cold water is cut off, it turns off the hot water supply to avoid scalding or sudden temperature changes.

**Ceramic inverter 2 outlets**



**PRESSURE BALANCE ceramic cartridge. Temperature and flow rate adjustment.**

