


Universal single-lever valve with 3 outlets

Cod. Product
VDE093-99

Finish
Material brass

Cod. EAN
8435305741396

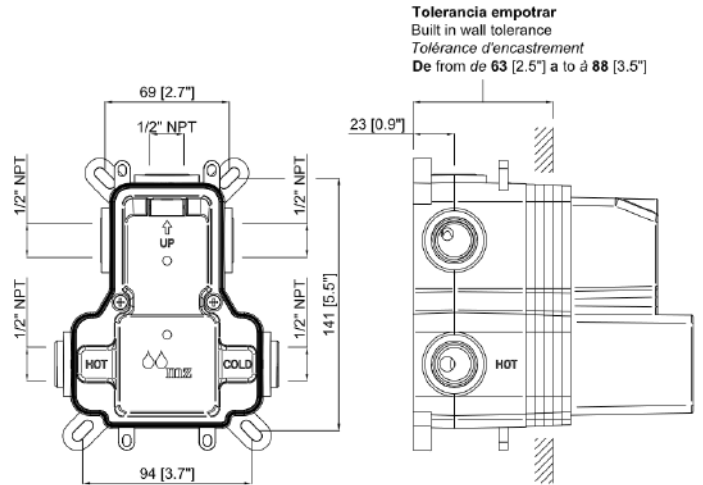

Specifications

- Brass body and components
- Flow rate 3 gpm (12,54 l/min) at 58 psi (3 bar)
- Minimum working pressure 1.4 bar (20 psi)
- Recommended working pressure 3 bar (58psi)
- Maximum working pressure 125 psi (8 bar (125 psi)
- Maximum recessed tolerance 40 (1.6") to 75 (3")



Included accessories

- MZ Box for easy installation.
- Pre-installation protective housing.
- Level incorporated in the installation box.



Standards

- UPC
- ASME A112.18.1
- ASSE 1016
- CSA B125.1.



Warranties

- 5 years against manufacturing defects.



If cold water is cut off, it turns off the hot water supply to avoid scalding or sudden temperature changes.

Ceramic inverter 3 outlets



PRESSURE BALANCE ceramic cartridge. Temperature and flow rate adjustment.

