
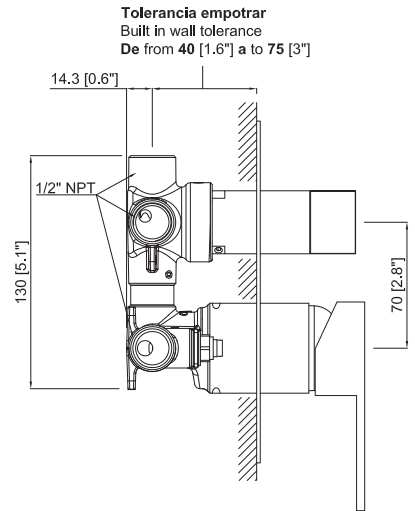


Concealed single lever shower mixer 3 outlets

Cod. Producto
30E191400

Cod. EAN
8435305734657

Acabado
Cromo

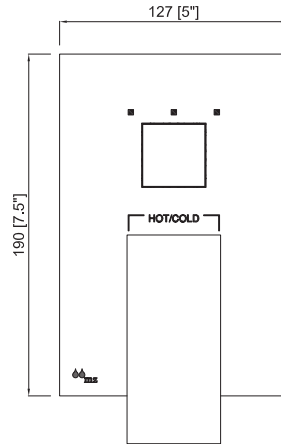

Specifications

- Brass body and components
- Coating: Nickel 15 micron, chrome 0.50 micron.
- Flow rate 3.7 gpm (14 l/min) @ 44 psi (3 bar)
- Minimum working pressure: 20 psi (1.4 bar)
- Recommended working pressure 3 bar (45psi)
- Maximum working pressure 125 psi (8 bar (125 bar)
- Built-in Tolerance 40 (1.6") to 75 (3")



Included accessories

- Integrated water shut-off valves.
- Pre-installation protective casing.



Standards

- UPC
- ASME A112.18.1
- ASSE 1016
- CSA B125.1.



Warranty

- 5 years against manufacturing defects.



Ante cortes de agua fría corta el suministro de agua caliente para evitar quemaduras o cambios bruscos de temperatura

Inversor cerámico 3 salidas



Cartucho cerámico
PRESSURE BALANCE.
Ajuste de temperatura y caudal.

