

Toilet build wall $\varnothing 25$ mm. p.balanc


Cod. Product
642561A33

Finish
PVD BRUSHED GUN

Cod. EAN
8435305744656



Tolerancia empotrar
Built in wall tolerance
Tolérance d'encastrement
De from de 27 a to à 40

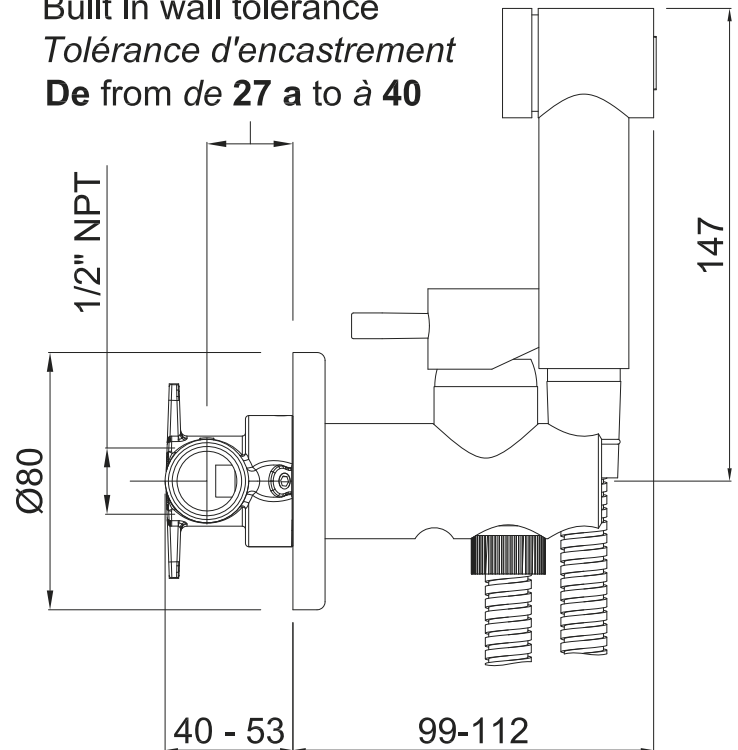

Specifications

- Anti-flood safety system
- Body material: brass.
- Coating: PVD (Physical Vapor Deposition) Brushed
- Maximum working pressure: 8 bar. For a pressure higher than 5 bar, the use of a pressure reducer in the supply network is recommended.
- Maximum temperature of hot water: 90°C.
- Flow rate: 8 l/m (2 gpm) at 3 bar (44 psi).
9 l/m (2.4 gpm) at 4 bar (58 psi).



Accessories included

- ABS shower handle with anti-drip system.
- Anti-twist PVC shower hose 1,25 m
- Pre-installation base, tolerance from 27 mm to 40 mm.
- Pre-installation plug.
- Filter gasket 1/2".



Standards

- EN200



Warranties

- 25 years against any manufacturing defect.
- 1 year against manufacturing defect on shower hose and handle.