



# Universal single-lever valve with 2 outlets


Cod. Product

CMB033-99


Cod. EAN

8435305741266

Finish  
Material brass

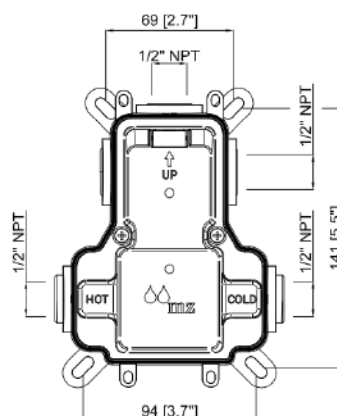

Tolerancia empotrar  
Built in wall tolerance  
Tolérance d'encastrement  
De from de 63 [2.5"] a to à 88 [3.5"]

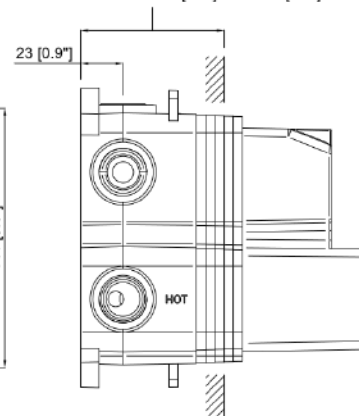

## Specifications

- Brass body and components
- Flow rate 3.7 gpm (14 l/min) at 44 psi (3 bar)
- Minimum working pressure 1.4 bar (20 psi)
- Recommended working pressure 3 bar (45psi)
- Maximum working pressure 125 psi (8 bar (125 psi)
- Maximum recessed tolerance 40 (1.6") to 75 (3")



## Included accessories

- MZ Box for easy installation.
- Pre-installation protective housing.
- Level incorporated in the installation box.



## Standards

- UPC
- ASME A112.18.1
- ASSE 1016
- CSA B125.1.



## Warranties

- 5 years against manufacturing defects.



stap!\*

If cold water is cut off, it turns off the hot water supply to avoid scalding or sudden temperature changes.

Ceramic inverter 2 outlets



PRESSURE BALANCE ceramic cartridge. Temperature and flow rate adjustment.



MZ DEL RÍO S.A.

Pol. Ind. Empresarium C\Lentisco, 12  
50720 La Cartuja Baja Zaragoza (Spain)

Find all spare parts in  
[www.mzrio.com](http://www.mzrio.com)