



Universal single-lever valve with 3 outlets


Cod. Product

VDE093-99

Cod. EAN

8435305741396

Finish
Material brass

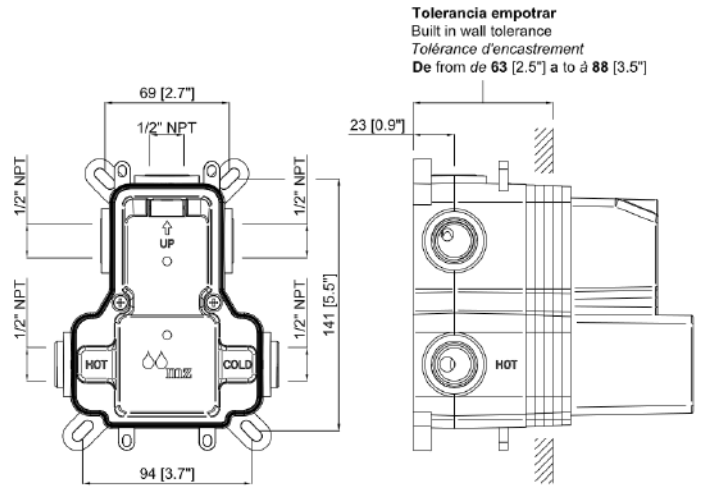

Specifications

- Brass body and components
- Flow rate 3.7 gpm (14 l/min) at 44 psi (3 bar)
- Minimum working pressure 1.4 bar (20 psi)
- Recommended working pressure 3 bar (45psi)
- Maximum working pressure 125 psi (8 bar (125 psi)
- Maximum recessed tolerance 40 (1.6") to 75 (3")



Included accessories

- MZ Box for easy installation.
- Pre-installation protective housing.
- Level incorporated in the installation box.



Standards

- UPC
- ASME A112.18.1
- ASSE 1016
- CSA B125.1.



Warranties

- 5 years against manufacturing defects.



stap!*

If cold water is cut off, it turns off the hot water supply to avoid scalding or sudden temperature changes.

Ceramic inverter 3 outlets



PRESSURE BALANCE ceramic cartridge. Temperature and flow rate adjustment.



MZ DEL RÍO S.A.

Pol. Ind. Empresarium C\Lentisco, 12
50720 La Cartuja Baja Zaragoza (Spain)

Find all spare parts in
www.mzrio.com