


Shower set 2 ways rough-in valve pressure balance

Cod. Product
30B890J69

Finish
Brushed Gold PVD

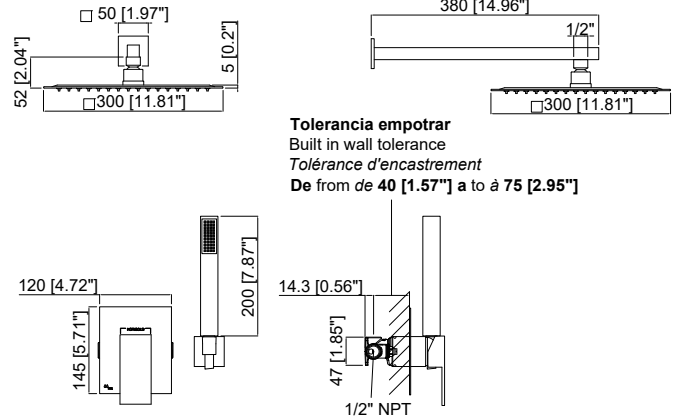

Tolerancia empotrar
Built in wall tolerance
Tolérance d'encastrement
De from de 40 [1.57"] a to à 75 [2.95"]

Specifications

- Material: Brass
- Coating: PVD (Physical Vapor Deposition) brushed
- Metal handles
- Built-in shut-off valves for easy maintenance
- Pressure balance single lever cartridge with temperature adjustment and flow rate
- Two outlet ceramic inverter
- Protective housing with depth indicator for easy installation
- Suitable for Legionella disinfection at 70°C (158°F)



When cold water is cut off, turn off the hot water supply to avoid scalding or sudden temperature changes.

Accessories included

- 300mm stainless steel spray head. Flow rate 9/L at 3 bar (2.38 gpm at 44 psi)
- Brass shower handle 1 position Flow rate: 7.26 l/m at 3 bar (2.48 gpm at 44 psi)
- MzBox for easy installation.



Faucet without hot surfaces to avoid burns.

Manufactured according to standard

- EN200 / UPC
- ASME A112.18.1
- ASSE 1016
- CSA B125.1

Warranties

- 5 years against any manufacturing defect.
- 1 year against manufacturing defect on shower hose and handle
- 25 years on PVD, against manufacturing defect.